BenchMark® HD-3 Aviation

Heavy Duty Bench Scale

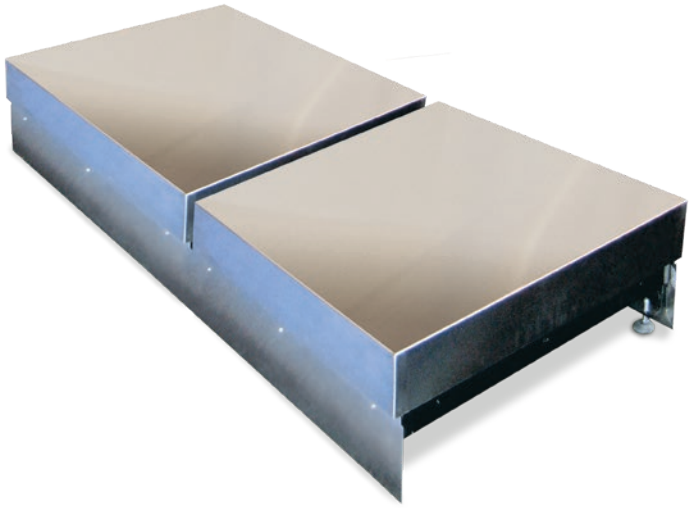

APPROVALS

Ideal for aviation weighing. A complete system can be sold with the Tracer® AV2. Reference Aviation section for specifications.

Specifications

Load Cell, NTEP Certified:
IP67 aluminum, environmentally sealed

Output Impedance:
350 ohm

Maximum Overload:
200%

Overload Protection:
Five-point, independently adjusted

Cable Length:
10 ft (3 m)

Compensated Temperature Range:
14˚ F to 104˚ F (-10˚ C to 40˚ C)

Warranty:
Two-year limited warranty

Approvals:
NTEP CC 06-010, Class III 5,000 d
Measurement Canada AM-5625, Class III 5,000 d
Load cell is cFMus

Standard Features

- Heavy-duty designed mild steel base construction with 304 stainless steel cover
- Polyurethane rubber leveling feet with stainless steel stems
- Load cell comes standard with DB-9 connector for connecting to Tracer AV2

Part Number/Price

Part #	Capacity	Platform Dimensions	Est. Weight	Price
Consult	500 lb (225 kg)	L x W x 12 in	330 lb	Consult

Note: Maximum size is up to 36in x 36in, height is always 12in
L x W supplied by customer.

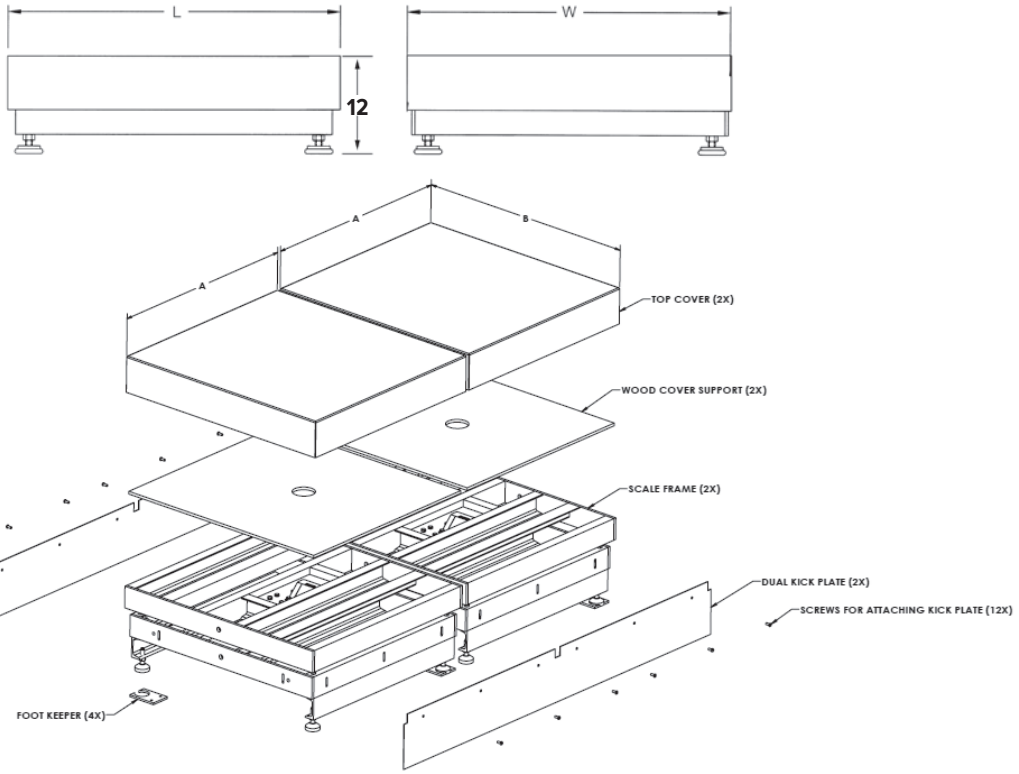

An ISO 9001 Registered Company ©2021/2022 Rice Lake Weighing Systems 11/21 Prices and specifications subject to change without notice. Visit ricelake.com for current prices.